

JB-G12-180 12V180Ah(10 hr)

Overview

Gel battery shows some distinctive advantages over flooded battery or AGM battery, such as super thermal stability, high deep discharge capability, good recovery from deep discharge, even if the battery is left discharged for three days, it will recover to 100% of capacity. With the above-mentioned advantages, the gel battery has long service life, specially suitable for motive power applications, such as golf trailer, srubber, folklift, etc. The deep discharge cycles increased 50% as compared with the AGM battery.

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	PE	Gelled acid



General Features

- Nanometer SiO₂ and H₂SO₄ gelled electrolyte technology for efficiency gas recombination of up to 99% and freedom from electrolyte maintenance or water adding
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.

Dimensions and Weight

Length(mm / inch)	522/20.55
Width(mm / inch)	238/9.37
Height(mm / inch)	218/ 8.58
Total Height(mm / inch)	223/ 8.78
Approx. Weight(Kg / lbs)	63/138.9

* Weight deviation: 3%

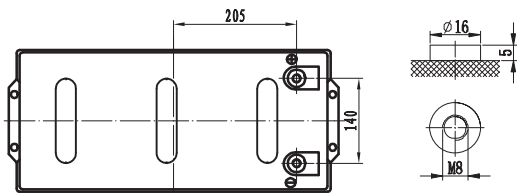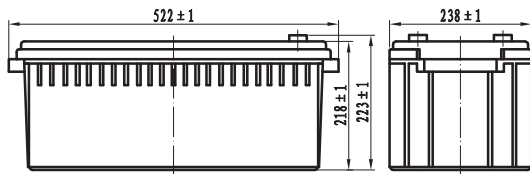

Battery Specification

Performance Characteristics	
Nominal Voltage	12V
Number of cell	6
Design Life	12years
Nominal Capacity 77°F(25°C)	
10 hour rate (18.0A, 10.8V)	180Ah
5 hour rate (31.7A, 10.5V)	158.5Ah
1 hour rate (115A, 9.6V)	115Ah
Internal Resistance	
Fully Charged battery 77 °F(25°C)	≤ 5 .5mOhms
Self-Discharge	
2% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	1000A(5s)
Short circuit Current	3500A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.40-2.45VPC
Maximum charging current	54A
Temperature compensation	-20mV/°C
Standby use	2.20-2.30VPC
Temperature compensation	-30mV/°C

Discharge Constant Current (Amperes at 77°F25°C)

End Point								
Volts/Cell	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	381	309	195	115	51.9	33.5	18.9	9.78
1.65V	358	290	191	112	51.0	32.9	18.7	9.67
1.70V	338	276	188	108	48.7	32.2	18.5	9.57
1.75V	312	253	172	104	46.3	31.7	18.3	9.50
1.80V	287	234	160	100	45.3	31.2	18.0	9.41

Discharge Constant Power (Watts at 77°F25 °C)

End Point								
Volts/Cell	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	665	550	377	272	221	133	106	67.1
1.65V	634	524	360	265	212	130	102	65.2
1.70V	608	507	349	259	209	126	98	64.5
1.75V	569	471	323	254	202	123	94	63.2
1.80V	532	443	306	250	200	121	91	62.3

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.All data shall be changed without notice, Vision reserves the right to explain and update the information contained hereinto.

JB-G12-180 12V180Ah(10 hr)

